

浙江松山机械有限公司
ZheJiang Songshan Machinery Co.,Ltd.

地址: 浙江省瑞安市阁巷高新技术产业园区围海大道1085号
Address: No. 1085, Weihai Avenue, Gexiang High-Tech Industrial Park,
Ruian City, Zhejiang Province
Tel: 0577-65660582
Fax: 0577-65669108
微信/WhatsApp:
+86-13906878892
+86-15501531500
E-mail: ss@ss-sj.com
www.ssmachinery.cn

为了提供更好的产品,我们会定期进行产品改良。
产品图片与实物略有不同时,请以实物为准。
In order to provide better products, we will carry
out product improvement on a regular basis.
When the product picture is slightly different from
the actual product, please refer to the actual product.



官方二维码



SA PlassMech 松山

**Film Blowing / Bag Making
Machine Manufacturer**
优秀的吹膜/制袋设备制造商

浙江松山机械有限公司
ZheJiang Songshan Machinery Co.,Ltd.

SA PlassMech 松山

Tracing To Source
Focusing On Innovation
追本溯源 专注创新



吹膜机系列
Film Blowing Machine
Series

以客户为中心
Customer Centric



制袋机系列
Bag Making Machine
Series

Values
核心价值观

诚信
Integrity

品质
Quality

创新
Innovation

团结
Unity

感恩
Gratitude

FUTURE BY SONGSHAN

专注美好未来 创新永不止步

优秀的**吹膜 / 制袋**设备制造商

About Plassmech

SINCE 1995

Genuine Quality Expert Choice

浙江松山机械有限公司创立于一九九五年，位于风景秀丽的东海之滨瑞安市，是专业生产各类塑料机械的企业。从创立至今，已形成自行开发、设计、制造、贸易、服务为一体的现代企业。系瑞安塑料机械协会会员单位，合同管理规范达标和管理先进单位。公司主要产品有各类 PE 吹膜机、PP 吹膜机、全自动冷切制袋机、高速热切制袋机、连卷袋背心袋制袋机等，并随着企业的快速发展，产品已逐步向相关领域拓展。公司从市场需求和生产实际出发，广泛吸收国内外塑机产品技术之长，利用高新技术改造传统产品、不断增加塑机产品的科技含量，多渠道降低塑机设备成本，产品性能不断提升，使用寿命有效延长。产品远销国外，深受国内外用户的青睐和赞誉。

Zhejiang Songshan Machinery Co. Ltd. was founded in 1995 and is located in the beautiful scenic city of Rui'an near the East Sea. Songshan is a qualified manufacturer of plastic machinery, specializing in film blowing machines, bag making machines, and related plastic machines.

Since its establishment, Songshan has become one of the most advanced plastic machinery manufacturers in Zhejiang. With a great emphasis on research and development, we keep seeking new and better ways to improve our machines.



Advanced Manufacturing Equipment Standardized Workshop Management

先进制造工艺
标准化车间管理

40+
专利
PATENT



不断追求变化和革新, 创造全新价值

公司坚持以市场为导向, 以质量为本, 以技术创新、管理创新为手段, 以效益为目标, 不断优化产品结构, 充分利用自身的研发、营销、品牌及人才优势, 增强研发及运营能力, 发展成为集产品研发、制造、销售为一体的全球塑料机械制造及专业服务的提供商。

Constantly Pursue Change And Innovation To Create New Value

The company will adhere to market-oriented, quality-oriented, technical and management innovation as the means, and efficiency as the goal, constantly optimize the product structure, make full use of its own research and development, marketing, brand and talent advantages, enhance research and development and operation capabilities, and develop into a global plastic machinery manufacturer and professional service provider integrating product research and development, manufacturer and sales.





FILM BLOWING MACHINE SERIES 吹膜机系列



FILM BLOWING MACHINE

- | | | | |
|-------|---|-------|--|
| 09 | SJ SERIES 50B-75B
全生物降解吹膜机系列
Fully biodegradable
film blowing machine series | 17 | SJCO & ABA SERIES 55/55-75/75
PE高低压双层共挤吹膜机系列
PE高低压ABA吹膜机系列
PE double-layer co-extrusion film
blowing machine series
PE ABA film blowing machine series |
| 10 | SJ SERIES 50/50B-60/60B
全生物降解双层共挤吹膜机系列
全生物降解ABA吹膜机系列
Fully biodegradable double-layer
co-extrusion film blowing machine series
Fully biodegradable ABA film blowing
machine series | 18 | SJCOT SERIES 50/55/50-65/75/65
PE高低压三层共挤吹膜机系列
PE three-layer co-extrusion film
blowing machine series |
| 11/12 | SJ SERIES 45L-55L
高速吹膜机系列
High speed film blowing
machine series | 19/20 | SJCOT SERIES 50/55/50A-65/75/65A
多层共挤吹膜机系列
Multi-layer co-extrusion
film blowing machine series |
| 13 | SJ SERIES 45M-50M
迷你型PE高低压吹膜机系列
Mini PE film blowing machine series | 21 | SJDC SERIES & SJDD SERIES
双彩条吹膜机系列
Double color film blowing
machine series
双模头吹膜机系列
Double die head film blowing
machine series |
| 14 | SJ SERIES 45-60
小型PE高低压吹膜机系列
Small PE film blowing machine series | 22 | SJPP SERIES 55-65
PP聚丙烯吹膜机系列
PP polypropylene film blowing
machine series |
| 15 | SJ SERIES 55-75
中型PE高低压吹膜机系列
Medium PE film blowing
machine series | | |
| 16 | SJ SERIES 90-120
大型PE高低压吹膜机系列
Large PE film blowing machine series | | |

SJ SERIES 50B-75B

全生物降解吹膜机系列
Fully biodegradable film blowing machine series

主要特点
Main Characteristics

该设备为我司特殊设计的，针对生物可降解料的特性，专用的一款可降解料吹膜机。适用于 PLA、PBAT 等可降解材料。为可降解基材，及各类混合料的吹膜之用。该设备采用特制的降解螺杆和降解模具，配套优异的冷却系统，具有高产量、高性能、高稳定性、产品绿色环保等特点。

This equipment is a special design by our company for the characteristics of biodegradable materials. It is a dedicated biodegradable film blowing machine, suitable for blowing PLA, PBAT as degradable substrates, and various types of mixed materials. The equipment adopts special degradable screws and degradable molds, and is equipped with the good quality cooling system. It has advantages of high yield, high performance, and high stability to produce environmental-friendly products.



主要技术参数
Technical Parameters

型号	Model	SJ-50B	SJ-55B	SJ-60B	SJ-65B	SJ-75B
适用原料	Raw material	全生物降解料				
		Biodegradable resin				
薄膜宽度	Film width(MM)	500	600	800	1000	1500
薄膜厚度	Film thickness(MM)	0.02-0.1	0.02-0.1	0.02-0.1	0.02-0.1	0.02-0.1
最大挤出量	Max.Extrusion output(KG/H)	60	80	100	120	150
螺杆直径	Screw diameter(MM)	50	55	60	65	75
螺杆长径比	Screw L/D ratio	30:1	30:1	30:1	30:1	30:1
主电机功率	Main motor(KW)	18.5	22	30	37	45
齿轮箱规格	Gear box	146	173	173	180	200
模口直径	Diameter of orifice(MM)	120	150	200	300	400
模头类型	Die head type	固定模头 /360°连续旋转模头				
		Fix/360°continuous rotation				
收卷类型	Winding type	单收卷 / 双收卷 / 自动收卷				
		Single winder/double back to back winder/automatic winder				
滚筒长度	Roller length(MM)	700	900	1200	1400	1800
安装尺寸	Dimension L*W*H(M)	4.5*2.8*5	5*3*5	5.8*3.2*6.5	6*3.4*6.5	6.5*3.5*7
机器重量	Gross weight(T)	2	2.5	3	3.5	4

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

SJ SERIES 50/50B-60/60B

全生物降解双层共挤吹膜机系列
全生物降解ABA吹膜机系列
Fully biodegradable double-layer co-extrusion film blowing machine series
Fully biodegradable ABA film blowing machine series

主要特点
Main Characteristics

该设备通过二台挤出机将两种相同或不同的物料塑化挤入共挤复合机，生产出经共挤成型的复合薄膜，从而大大提高了薄膜物理性能、增加了强度，使薄膜具有良好的阻隔性，气密性。另可采用连续旋转机头，使制品平整，均匀度好，保证了包装，印刷等后续工序设备对薄膜的质量要求，适合生产复合全生物降解塑料薄膜，绝缘膜，多功能农用薄膜等。

This equipment uses two extruders to plasticize and extrude two types of the same or different materials into a co-extrusion composite machine, producing a co-extruded composite film, which greatly improves the physical properties and strength of the film, making the film have good barrier properties and airtightness. The continuous rotating die head can be used to produce flat and uniform products, ensuring the quality of the film for subsequent processes such as packaging and printing equipment. It is suitable for producing composite fully biodegradable plastic films, insulating films, multi-functional agricultural films, etc.



主要技术参数
Technical Parameters

型号	Model	SJ-50/50B	SJ-55/55B	SJ-60/60B
适用原料	Raw material	全生物降解料		
		Biodegradable resin		
薄膜宽度	Film width(MM)	600	800	1000
薄膜厚度	Film thickness(MM)	0.02-0.1	0.02-0.1	0.02-0.1
最大挤出量	Max.Extrusion output(KG/H)	120	150	200
螺杆直径	Screw diameter(MM)	50/50	55/55	60/60
螺杆长径比	Screw L/D ratio	30:1	30:1	30:1
主电机功率	Main motor(KW)	18.5/18.5	22/22	30/30
齿轮箱规格	Gear box	146/146	173/173	180/180
模口直径	Diameter of orifice(MM)	160	200	300
模头类型	Die head type	固定模头 /360°连续旋转模头		
		Fix/360°continuous rotation		
收卷类型	Winding type	单收卷 / 双收卷 / 自动收卷		
		Single winder/double back to back winder/automatic winder		
滚筒长度	Roller length(MM)	900	1200	1400
安装尺寸	Dimension L*W*H(M)	5*3*5	5.8*3.2*6.5	6*3.4*6.5
机器重量	Gross weight(T)	3	3.5	4

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

SJ SERIES 45L-55L

高速吹膜机系列
High speed film blowing machine series

 主要特点
Main Characteristics

本吹膜机采用先进的配件及精细化的组装，为我公司所设计的高速吹塑机型，其中吹塑效果和质量为国内领先，具有台湾品质，自动化程度高，生产效益好等特点。高速吹膜机为生产高品质塑料膜提供了高效的解决方案，具有改善性能特性。它们为寻求高产量及改善包装能力的企业提供了一种多用途的选择。

This film blowing machine adopts advanced accessories and refined assembly. It is a high-speed blowing machine designed by our company. The blowing effect and quality are domestically leading along with Taiwan quality, high degree of automation and good production efficiency. High speed film blowing machines provide an efficient solution for producing high quality plastic films with improved performance characteristics. They provide a versatile option for businesses looking for high throughput and improved packaging capabilities.

 主要技术参数
Technical Parameters

型号	Model	SJ-45L	SJ-50L	SJ-55L
适用原料	Raw material	HDPE/LDPE/LLDPE		
薄膜宽度	Film width(MM)	600	600	800
薄膜厚度	Film thickness(MM)	0.01-0.1	0.01-0.1	0.01-0.1
最大挤出量	Max.Extrusion output(KG/H)	80	100	120
螺杆直径	Screw diameter(MM)	45	50	55
螺杆长径比	Screw L/D ratio	30:1	30:1	30:1
主电机功率	Main motor(KW)	15	18.5	22
齿轮箱规格	Gear box	146	173	180
模口直径	Diameter of orifice(MM)	50	60	80
模头类型	Die head type	固定模头 /360°连续旋转模头 Fix/360°continuous rotation		
收卷类型	Winding type	单收卷 / 双收卷 / 自动收卷 Single winder/double back to back winder/automatic winder		
滚筒长度	Roller length(MM)	700	700	900
安装尺寸	Dimension L*W*H(M)	4.5*2.8*4.6	4.5*2.8*4.6	5*3*5
机器重量	Gross weight(T)	2.5	2.5	3

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.



SJ SERIES 45M-50M

迷你型PE高低压吹膜机系列
Mini PE film blowing machine series



主要特点
Main Characteristics

迷你吹膜机紧凑高效，非常适合小规模生产或者空间有限的生产商。
迷你吹膜机的生产能力通常比大型机器小，但它们仍能生产出一致厚度和宽度的高质量薄膜。它们也易于操作和维护，因此是小型企业和初创企业的流行选择。

The mini film blowing machine is designed to be compact and efficient, making it ideal for small-scale production or for those who have limited space.
Mini film blowing machines typically have a smaller production capacity than larger machines, but they are still capable of producing high-quality films with consistent thickness and width. They are also easy to operate and maintain, making them a popular choice for small businesses and startups.

主要技术参数
Technical Parameters

型号	Model	SJ-45M	SJ-50M
适用原料	Raw material	HDPE/LDPE/LLDPE	HDPE/LDPE/LLDPE
薄膜宽度	Film width(MM)	500	600
薄膜厚度	Film thickness(MM)	0.01-0.15	0.01-0.15
最大挤出量	Max.Extrusion output(KG/H)	40	50
螺杆直径	Screw diameter(MM)	45	50
螺杆长径比	Screw L/D ratio	30:1	30:1
主电机功率	Main motor(KW)	11	15
齿轮箱规格	Gear box	133	146
模口直径	Diameter of orifice(MM)	50/80	60/100
模头类型	Die head type	固定模头 /360°连续旋转模头 Fix/360°continuous rotation	
收卷类型	Winding type	单收卷 / 双收卷 / 自动收卷 Single winder/double back to back winder/automatic winder	
滚筒长度	Roller length(MM)	700	800
安装尺寸	Dimension L*W*H(M)	2.65*1.8*3.4	2.9*1.9*3.4
机器重量	Gross weight(T)	2	2.5

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

SJ SERIES 45-60

小型PE高低压吹膜机系列
Small PE film blowing machine series

主要特点
Main Characteristics

本机组可生产 LDPE、LLDPE、HDPE 等为原料的塑料膜。宽度范围 600-1000mm，可用于制作各类小尺寸塑料包装袋，如食品包装，超市购物袋，服装包装袋，零件包装袋等。
本机组挤出机的机筒、螺杆均采用优质合金钢，经氮化和精密加工。具有最佳的硬度和耐腐蚀性。集成配电箱设计，使操作更方便，并配置定泡圈。卷取装置采用力矩电机，可保持适宜的张力，收卷整齐，换卷方便。

This machine can produce plastic films using materials such as LDPE, LLDPE, and HDPE. The width range is 600-1000mm, and they can be used to make various small-sized plastic packaging bags, such as food packaging, supermarket shopping bags, clothing packaging bags, and parts packaging bags, etc.
The barrel and screw stems of the extruder are made of high quality alloy steel with optimum hardness and strong corrosion resistance after nitrogen treatment and precision finishing. The integrated control cabinet for making operation easily and equipped with bubble stabilizing ring. The rewinders adopt torque motor to keep proper tension, winding orderly and easily changing the roll.



主要技术参数
Technical Parameters

型号	Model	SJ-45	SJ-50	SJ-55	SJ-60
适用原料	Raw material	HDPE/LDPE/LLDPE	HDPE/LDPE/LLDPE	HDPE/LDPE/LLDPE	HDPE/LDPE/LLDPE
薄膜宽度	Film width(MM)	600	600	700	1000
薄膜厚度	Film thickness(MM)	0.01-0.15	0.01-0.15	0.01-0.15	0.01-0.15
最大挤出量	Max.Extrusion output(KG/H)	30	35	40	60
螺杆直径	Screw diameter(MM)	45	50	55	60
螺杆长径比	Screw L/D ratio	30:1	30:1	30:1	30:1
主电机功率	Main motor(KW)	11	11	15	22
齿轮箱规格	Gear box	133	133	146	173
模口直径	Diameter of orifice(MM)	50/80	60/80	80/160	160/260
模头类型	Die head type	固定模头 Fix	固定模头 Fix	固定模头 Fix	固定模头 Fix
收卷类型	Winding type	单收卷 Single winder	单收卷 Single winder	单收卷 Single winder	单收卷 Single winder
滚筒长度	Roller length(MM)	700	700	900	1200
安装尺寸	Dimension L*W*H(M)	4*2.7*4.2	4*2.7*4.2	4.5*2.9*4.4	5*3.2*5.6
机器重量	Gross weight(T)	2	2	2.5	3

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

SJ SERIES 55-75

中型PE高低压吹膜机系列
Medium PE film blowing machine series



主要特点 Main Characteristics

本机组可生产 LDPE、LLDPE、HDPE 等为原料的塑料膜。宽度范围 800-1500mm，可用于制作各类稍大尺寸塑料包装，如家装防尘罩，家电包装等。本机组另可加配 360 度旋转模头，使产品更加平整、均匀。除筒膜外，背靠背双收卷设计可实现两卷片膜的同时收卷。

This machine can produce plastic film of LDPE, LLDPE, HDPE and so on. The width range is 800-1500mm, and they can be used to make various slightly larger plastic packaging, such as home decoration dust covers, household appliance packaging, etc. This series can also be equipped with a 360-degree rotating die head to make the product more flat and uniform. In addition to the tube film, the back-to-back double winding design can manage the simultaneous winding of two rolls of single layer flat film.

主要技术参数 Technical Parameters

型号	Model	SJ-55	SJ-60	SJ-65	SJ-75
适用原料	Raw material	HDPE/LDPE/LLDPE			
薄膜宽度	Film width(MM)	800	1000	1200	1500
薄膜厚度	Film thickness(MM)	0.01-0.15	0.01-0.15	0.01-0.15	0.01-0.15
最大挤出量	Max.Extrusion output(KG/H)	50	70	80	100
螺杆直径	Screw diameter(MM)	55	60	65	75
螺杆长径比	Screw L/D ratio	30:1	30:1	30:1	30:1
主电机功率	Main motor(KW)	15	22	30	45
齿轮箱规格	Gear box	146	173	180	200
模口直径	Diameter of orifice(MM)	80/160	120/220	160/260	400
模头类型	Die head type	固定模头 /360°连续旋转模头 Fix/360°continuous rotation			
收卷类型	Winding type	单收卷 / 双收卷 / 自动收卷 Single winder/double back to back winder/automatic winder			
滚筒长度	Roller length(MM)	900	1200	1400	1800
安装尺寸	Dimension L*W*H(M)	5*3*4.4	5.8*3.2*5.6	6*3.4*5.6	7.5*3.5*6.8
机器重量	Gross weight(T)	3	3.5	4	4.5

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice. 可按客户要求定制机器。Machines can be customized according to customer requirements.

SJ SERIES 90-120

大型PE高低压吹膜机系列
Large PE film blowing machine series

主要特点 Main Characteristics

本机组可生产 LDPE、LLDPE、HDPE 等为原料的塑料膜。宽度范围 1800mm 及以上，可用于制作各类大尺寸塑料包装，如农用大棚膜，地膜等。本机组另可加配 360 度旋转模头，使产品更加平整、均匀。除筒膜外，背靠背双收卷设计可实现两卷片膜的同时收卷。考虑到薄膜尺寸过宽，可采用自动飞刀收卷，实现自动化切膜换卷、气动上下料，大大节省人工。

This machine can produce plastic film of LDPE,LLDPE,H-DPE and so on. The width range is 1800mm and above, and they can be used to make various large-sized plastic packaging, such as agricultural greenhouse films, mulching films, etc. This series can also be equipped with a 360-degree rotating die head to make the product more flat and uniform. In addition to the tube film, the back-to-back double winding design can manage the simultaneous winding of two rolls of single layer flat film. Considering that the size of the film is too wide, an automatic rewinder with flying knife can be used for winding to manage automatic film cutting, roll changing and pneumatic charge and discharge, greatly saving labor.

主要技术参数 Technical Parameters

型号	Model	SJ-90	SJ-100	SJ-110	SJ-120
适用原料	Raw material	HDPE/LDPE/LLDPE			
薄膜宽度	Film width(MM)	1800	2000	2400	3000
薄膜厚度	Film thickness(MM)	0.01-0.15	0.01-0.15	0.01-0.15	0.01-0.15
最大挤出量	Max.Extrusion output(KG/H)	200	250	300	350
螺杆直径	Screw diameter(MM)	90	100	110	120
螺杆长径比	Screw L/D ratio	30:1	30:1	30:1	30:1
主电机功率	Main motor(KW)	55	75	90	110
齿轮箱规格	Gear box	225	250	280	315
模口直径	Diameter of orifice(MM)	450	500	600	800
模头类型	Die head type	固定模头 /360°连续旋转模头 Fix/360°continuous rotation			
收卷类型	Winding type	单收卷 / 双收卷 / 自动收卷 Single winder/double back to back winder/automatic winder			
滚筒长度	Roller length(MM)	2000	2200	2600	3200
安装尺寸	Dimension L*W*H(M)	8*3.7*8	8.5*4*9	9.2*4.5*10.5	10*5.1*12.5
机器重量	Gross weight(T)	6	7	7.5	9

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice. 可按客户要求定制机器。Machines can be customized according to customer requirements.



SJCO & ABA SERIES 55/55-75/75

PE高低压双层共挤吹膜机系列
PE高低压ABA吹膜机系列

PE double-layer co-extrusion film blowing machine series
PE ABA film blowing machine series

主要特点
Main Characteristics

双层共挤吹膜机和 ABA 吹膜机系列，均采用两台挤出机，复合生产 AB 两层或者 ABA 三层高强度薄膜。其中 ABA 吹膜机，两台主机供应三层挤出，一台提供内外涂层层，另一台供应内部填充层，达到降低成本、节能降耗的目的。同时，内部填充层可以添加回收料和碳酸钙，其占比超过总产量的 80% 以上，可以大大降低生产过程中的原料成本，为客户提供更强劲的市场竞争力。

Double-layer co-extrusion film blowing machine and ABA film blowing machine series both use two extruders to produce AB two-layer or ABA three-layer high-strength film. Among them, ABA film blowing machine, with two hosts supply three-layer extrusion, one provides inner and outer coating layers, and the other supplies inner filling layer. Can achieve the purpose of cost reduction, energy saving and low consumption. At the same time, recycled materials and calcium carbonate can be added to the internal filling layer, which account for more than 80% of the total output, which can greatly reduce the cost of raw materials in the production process and provide customers with stronger market competitiveness.

主要技术参数
Technical Parameters

型号	Model	SJCO-55/55 ABA-55/55	SJCO-65/65 ABA-65/65	SJCO-75/75 ABA-75/75
适用原料	Raw material	HDPE/LDPE/LLDPE		
薄膜宽度	Film width(MM)	1000	1500	2000
薄膜厚度	Film thickness(MM)	0.01-0.15	0.01-0.15	0.01-0.15
最大挤出量	Max.Extrusion output(KG/H)	150	200	250
螺杆直径	Screw diameter(MM)	55/55	65/65	75/75
螺杆长径比	Screw L/D ratio	30:1	30:1	30:1
主电机功率	Main motor(KW)	22/22	30/30	45/45
齿轮箱规格	Gear box	173/173	180/180	200/200
模口直径	Diameter of orifice(MM)	280	380	500
模头类型	Die head type	固定模头 /360°连续旋转模头 Fix/360°continuous rotation		
收卷类型	Winding type	单收卷 / 双收卷 / 自动收卷 Single winder/double back to back winder/automatic winder		
滚筒长度	Roller length(MM)	1400	1800	2200
安装尺寸	Dimension L*W*H(M)	6.5*3.4*6.5	7.5*3.5*8	7.5*4*10.5
机器重量	Gross weight(T)	4	5	8

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

SJCOT SERIES 50/55/50-65/75/65

PE高低压三层共挤吹膜机系列
PE three-layer co-extrusion film blowing machine series

PE three-layer co-extrusion film blowing machine series

主要特点
Main Characteristics

本机组在设计上吸收了国内外同类产品先进水平，采用了三台挤出机，分层式 360 度模头连续旋转装置、高效冷却双风口风环、快速换网装置、双剖双收表面摩擦收卷机等先进技术和装备。
本机组可生产 LDPE、LLDPE、HDPE 等为原料的三层复合膜。具有阻隔性好、防湿、防霜冻、耐油等特点，因此可广泛用于重包装，如各类鲜果、肉食品、鲜牛奶、液体饮料等的包装领域。

This machine has absorbed advanced technology and equipment from similar products both domestically and internationally. It adopts advanced technologies and equipments such as three extruders, a layered 360-degree rotating die head, air rings with high-performance and double lips. And the machine is with high speed screen changer, double rewinder and so on.
This machine can produce composite 3 layer films made of LDPE, LLDPE, HDPE, and other raw materials. These films have good barrier properties, moisture resistance, frost resistance, and oil resistance, making them suitable for various heavy packaging such as for fresh fruits, meat products, fresh milk, liquid beverages, and more.

主要技术参数
Technical Parameters

型号	Model	SJCOT-50/55/50	SJCOT-60/65/60	SJCOT-65/75/65
适用原料	Raw material	HDPE/LDPE/LLDPE		
薄膜宽度	Film width(MM)	1000	1500	2000
薄膜厚度	Film thickness(MM)	0.008-0.15	0.008-0.15	0.008-0.15
最大挤出量	Max.Extrusion output(KG/H)	150	200	300
螺杆直径	Screw diameter(MM)	50/55/50	60/65/60	65/75/65
螺杆长径比	Screw L/D ratio	32:1	32:1	32:1
主电机功率	Main motor(KW)	18.5/22/18.5	30/37/30	37/45/37
齿轮箱规格	Gear box	173/173/173	173/180/173	180/200/180
模口直径	Diameter of orifice(MM)	300	380	500
模头类型	Die head type	360°连续旋转模头 360°continuous rotation		
收卷类型	Winding type	单收卷 / 双收卷 / 自动收卷 Single winder/double back to back winder/automatic winder		
滚筒长度	Roller length(MM)	1400	1800	2200
安装尺寸	Dimension L*W*H(M)	6*3.5*8	7.5*4*10.5	8.1*4.4*12.5
机器重量	Gross weight(T)	5	7	9

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

SJCOT SERIES 50/55/50A-65/75/65A

多层共挤吹膜机系列
Multi-layer co-extrusion film blowing machine series

 主要特点
Main Characteristics

本机组为了满足客户对高质、高产吹膜设备的要求，采用了带有强制进料功能的挤出机、精密型双风口风环、水平式上牵引旋转系统、IBC 内冷系统、全自动双剖双收表面摩擦收卷机、计算机集中控制系统等先进技术和装备。与同类设备相比，具有结构更紧凑、产量更高、制品质量更好、机器更节能、操作更简便等优点。可以广泛用于各类高透明性包装三层及以上复合薄膜的生产，为您创造可观的经济效益。

This machine adopts advanced technologies and equipments, such as extruders with forced feeding function, a precision double-lip air ring, a horizontal rotary tower traction system, IBC inner cooling system, fully automatic surface friction type double winder, and a computer centralized control system, in order to meet customers' requirements for high-quality and high output film blowing equipment. Compared to similar equipment, it has the advantages of a more compact structure, higher output, better product quality, more energy efficiency, and easier operation. It can be widely used in the production of various high-transparency three-layer and above composite packaging films, creating considerable economic benefits for you.



自动测厚及自动风环
Automatic thickness control
with automatic air ring



上牵引旋转
Rotary tower



IBC 辅机控制系统
Inner bubble cooling system



EPC 纠偏系统
Edge position controller

 主要技术参数
Technical Parameters

型号	Model	SJCOT-50/55/50A	SJCOT-60/65/60A	SJCOT-65/75/65A
适用原料	Raw material	HDPE/LDPE/LLDPE 等。 HDPE/LDPE/LLDPE etc.		
薄膜宽度	Film width(MM)	1000	1500	2000
薄膜厚度	Film thickness(MM)	0.008-0.15	0.008-0.15	0.008-0.15
最大挤出量	Max.Extrusion output(KG/H)	150	200	300
螺杆直径	Screw diameter(MM)	50/55/50	60/65/60	65/75/65
螺杆长径比	Screw L/D ratio	32:1	32:1	32:1
主电机功率	Main motor(KW)	18.5/22/18.5	30/37/30	37/45/37
齿轮箱规格	Gear box	173/173/173	173/180/173	180/200/180
模口直径	Diameter of orifice(MM)	300	380	500
模头类型	Die head type	多层模头带上牵引旋转 Multi-layer with rotary tower		
收卷类型	Winding type	单收卷 / 双收卷 / 自动收卷 Single winder/double back to back winder/automatic winder		
滚筒长度	Roller length(MM)	1400	1800	2200
安装尺寸	Dimension L*W*H(M)	9*6.8*8	10*7.2*10.5	11*7.6*12.5
机器重量	Gross weight(T)	12	14	16

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
我们可以根据客户的要求定做机器，也可提供五层及以上型号。
Machine can be made as client requirement, and models with five layers and above are also available.



SJDC SERIES & SJDD SERIES

双彩条吹膜机系列

Double color film blowing machine series

主要特点
Main Characteristics

彩条吹膜机配备双挤出机和一个彩条专用模头,其产品具有双色彩条,广泛应用于水果、食品、服装、纺织品、日用品等民用品和工业品包装。

The double color strips film blowing machine is equipped with double extruders and one special color stripe die head, which can produce products with double color strips. It is widely used in the packaging of consumer goods and industrial products, such as fruits, food, clothing, textiles, daily necessities, etc.

主要技术参数
Technical Parameters

型号	Model	SJDC-45	SJDC-50
适用原料	Rawt material	HDPE/LDPE/LLDPE	
薄膜宽度	Film width(MM)	500	600
薄膜厚度	Film thickness(MM)	0.008-0.08	0.008-0.08
最大挤出量	Max.Extrusion output(KG/H)	30	40
螺杆直径	Screw diameter(MM)	45x2	50x2
螺杆长径比	Screw L/D ratio	30:1	30:1
主电机功率	Main motor(KW)	11x2	15x2
齿轮箱规格	Gear box	133/133	146/146
模口直径	Diameter of orifice(MM)	65	80
模头类型	Die head type	固定模头 Fix	
收卷类型	Winding type	单收卷 / 双收卷 / 自动收卷	
		Single winder/double back to back winder/automatic winder	
滚筒长度	Roller length(MM)	700	900
安装尺寸	Dimension L*W*H(M)	4*2.7*4.2	5*2.9*4.4
机器重量	Gross weight(T)	2.5	2.6

注：数据如有更改,恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.



双模头吹膜机系列

Double die head film blowing machine series

主要特点
Main Characteristics

本机配备一组挤出机,两个模头,一进二出实现双线作业,具有提高生产率,节省能源、生产空间等优点。

This machine is equipped with one set of extruder and two die heads. Allowing double line working, which can increase production capacity, save energy and production space.

主要技术参数
Technical Parameters

型号	Model	SJDD-50	SJDD-55	SJDD-60
适用原料	Rawt material	HDPE/LDPE/LLDPE		
薄膜宽度	Film width(MM)	400	500	600
薄膜厚度	Film thickness(MM)	0.008-0.10	0.008-0.10	0.008-0.10
最大挤出量	Max.Extrusion output(KG/H)	HDPE:70 / LDPE:60	HDPE:90 / LDPE:80	HDPE:110 / LDPE:100
螺杆直径	Screw diameter(MM)	50	55	60
螺杆长径比	Screw L/D ratio	30:1	30:1	30:1
主电机功率	Main motor(KW)	15	18.5	22
齿轮箱规格	Gear box	146	173	173
模口直径	Diameter of orifice(MM)	HDPE:50 / LDPE: 120	HDPE:55 / LDPE:160	HDPE:80 / LDPE:180
模头类型	Die head type	固定模头 /360°连续旋转模头 Fix/360°Continuous Rotation		
收卷类型	Winding type	单收卷 / 双收卷 / 自动收卷 Single winder/double back to back winder/automatic winder		
滚筒长度	Roller length(MM)	500	600	700
安装尺寸	Dimension L*W*H(M)	5.8*4.6*4.4	6*5*4.6	6.2*5.5*4.6
机器重量	Gross weight(T)	3	4	4.5

注：数据如有更改,恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

SJPP SERIES 55-65

PP聚丙烯吹膜机系列

PP polypropylene film blowing machine series

主要特点
Main Characteristics

用于吹制 PP 聚丙烯为原料的塑料膜。相较于 PE 聚乙烯材料,PP 聚丙烯材料在水冷下更为通透,使其广泛应用于食品、服装、纺织品、日用品和工业用品的包装。本机采用下吹水冷式,挤出机的机筒、螺杆均采用优质合金钢,经氮化和精密加工。具有最佳的硬度和耐腐蚀性。

This machine is used to blow plastic film made from PP polypropylene as raw material. Compared with PE polyethylene materials, PP polypropylene materials are more transparent under water cooling, making them widely used in the packaging of food, clothing textiles, daily necessities and industrial products. The unit adopts down-blown water-cooled type, and the barrel and screw of the extruder are made of high-quality alloy steel, which has been nitrided and precision-processed. Has the best hardness and corrosion resistance.



主要技术参数
Technical Parameters

型号	Model	SJPP-55	SJPP-60	SJPP-65
适用原料	Raw material	PP	PP	PP
薄膜宽度	Film width(MM)	400	600	800
薄膜厚度	Film thickness(MM)	0.02-0.1	0.02-0.1	0.02-0.1
最大挤出量	Max.Extrusion output(KG/H)	30	40	50
螺杆直径	Screw diameter(MM)	55	60	65
螺杆长径比	Screw L/D ratio	30:1	30:1	30:1
主电机功率	Main motor(KW)	15	18.5	22
齿轮箱规格	Gear box	146	173	173
模口直径	Diameter of orifice(MM)	200	250	300
模头类型	Die head type	固定模头 /360°连续旋转模头 Fix/360°continuous rotation		
收卷类型	Winding type	单收卷 / 双收卷 / 自动收卷		
		Single winder/double back to back winder/automatic winder		
滚筒长度	Roller length(MM)	600	800	1000
安装尺寸	Dimension L*W*H(M)	6*1.5*4.5	6*1.7*5	6*2.5*5
机器重量	Gross weight(T)	2	3	3.5

注：数据如有更改,恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.



BAG MAKING MACHINE SERIES 制袋机系列



吹膜
Film Blowing
Machine



印刷
Printing
Machine



制袋
Bag Making
Machine



回收
Plastic Recycling
Machine




BAG MAKING MACHINE

- | | | | |
|----|--|-------|--|
| 25 | 单/多线冷切制袋机
Single/multi-line cold cutting
bag making machine | 31 | SJR SERIES 500-1000
边封制袋机
Side sealing bag making machine |
| 26 | 自动化冷切制袋机
Automatic cold cutting bag
making machine | 32 | SPECIAL SHAPE BAG MAKING MACHINE
异形袋制袋机 |
| 27 | 单/多线热切制袋机
Single/multi-line hot cutting
bag making machine | 33 | YT SERIES 2600-61200
柔版印刷机
Flexographic printing machine |
| 28 | KS SERIES 800S-1000D
高速单/双线热切背心袋制袋机
High speed single/double line
hot cutting T-shirt bag making
machine | 34 | ASY SERIES 600-1200A
凹版印刷机
Gravure printing machine
高速电脑凹版印刷机
High-speed computer
gravure printing machine |
| 29 | SSR SERIES 500-1020
半自动连卷袋制袋机
Semi-automatic roll
bag making machine
全自动连卷袋制袋机
Fully automatic roll
bag making machine | 35 | SLZ SERIES 90-120/130
单机造粒机
Single stage recycling machine
子母造粒机
Double stage recycling machine |
| 30 | SG SERIES & KSG SERIES 500
半自动一次性塑料手套机
Semi-automatic disposable
plastic glove making machine
全自动一次性塑料手套机
Fully automatic disposable
plastic glove making machine | 36 | LS SERIES & WS SERIES 700-2400
分切机
Slitting machine |
| | | 37/38 | 辅助设备
Auxiliary equipment |

单/多线冷切制袋机

单线冷切制袋机

Single line cold cutting bag making machine

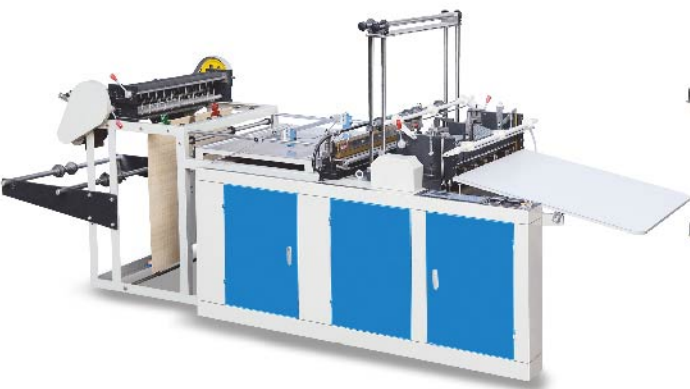

双线冷切制袋机

Double lines cold cutting bag making machine




四线冷切制袋机

Four lines cold cutting bag making machine



六线冷切制袋机

Six lines cold cutting bag making machine

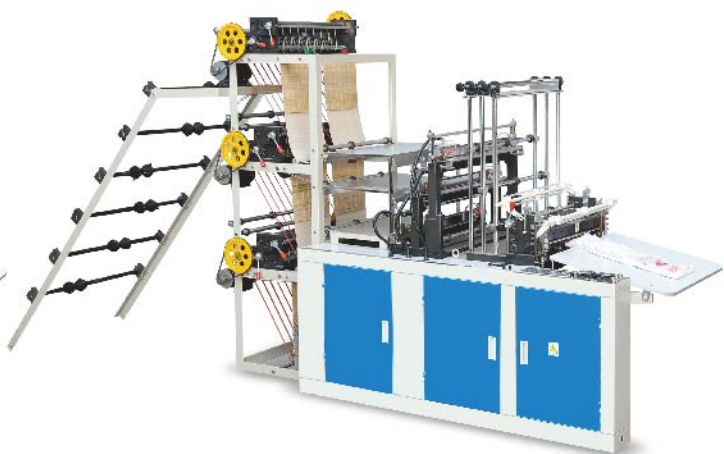


主要技术参数
Technical Parameters

型号	Model	SHXJ-600	SHXJ-700	SHXJ-800	SHXJ-900	SHXJ-1000
制袋条数	Cutting line	1-6 线 /1-6 Line				
最大宽度	Max.Bag width(MM)	500	600	700	800	900
产品长度	Bag length(MM)	1000	1000	1000	1000	1000
制袋速度	Cutting speed(PC/MIN)	50-120/线 50-120/Line				
同步电机	Film pulling	步进电机 / 伺服电机 Stepper motor/servo motor				
使用电源	Power supply	220V, 50Hz				

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.




自动化冷切制袋机

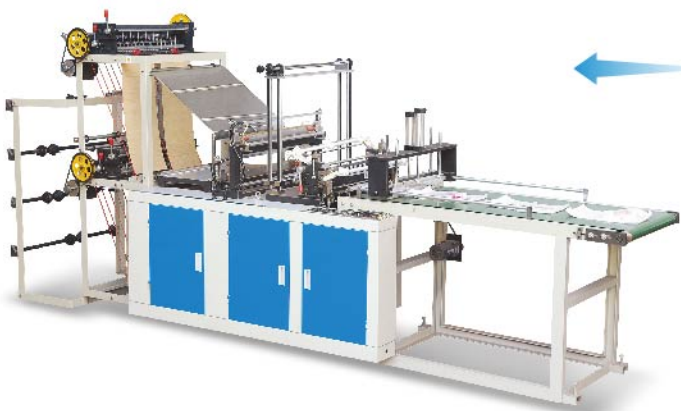

冷切制袋机带输送带
Cold-cutting bag making machine with conveyor

双线冷切背心袋制袋机

Double lines cold cutting T-shirt bag making machine

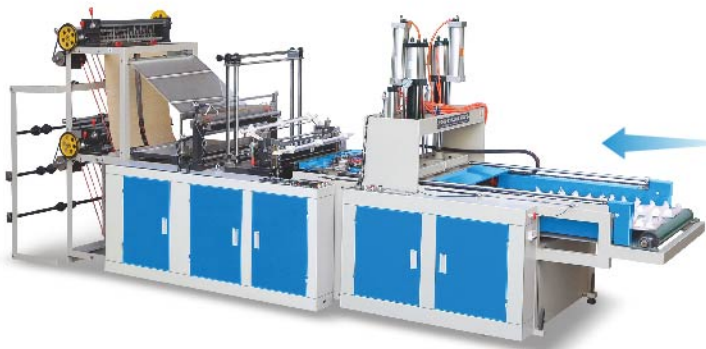

四线冷切背心袋制袋机
Four lines cold cutting T-shirt bag making machine

主要技术参数
Technical Parameters

型号	Model	SSC-600	SSC-700	SSC-800	SSC-900	SSC-1000
制袋条数	Cutting line	1-6 线 /1-6 Line				
最大宽度	Max.Bag width(MM)	500	600	700	800	900
产品长度	Bag length(MM)	1000	1000	1000	1000	1000
制袋速度	Cutting speed(PC/MIN)	50-120/ 线 50-120/line				
同步电机	Film pulling	步进电机 / 伺服电机 Stepper motor/servo motor				
输送带电机	Conveyor motor(KW)	1.5	1.5	1.5	1.5	1.5
冲压气缸	Punching air cylinder(T)	5	5	5	5	5
使用电源	Power supply	220V, 50Hz	220V, 50Hz	220V, 50Hz	220V, 50Hz	220V, 50Hz


注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.



单/多线热切制袋机




单线热切制袋机
Single line hot cutting
bag making machine

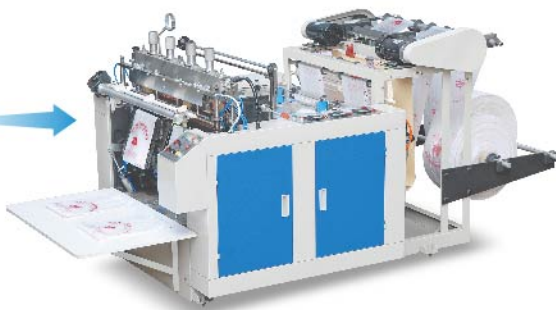

双线热切制袋机
Double lines hot cutting
bag making machine



单线热切背心袋制袋机
Single line hot cutting T-shirt
bag making machine

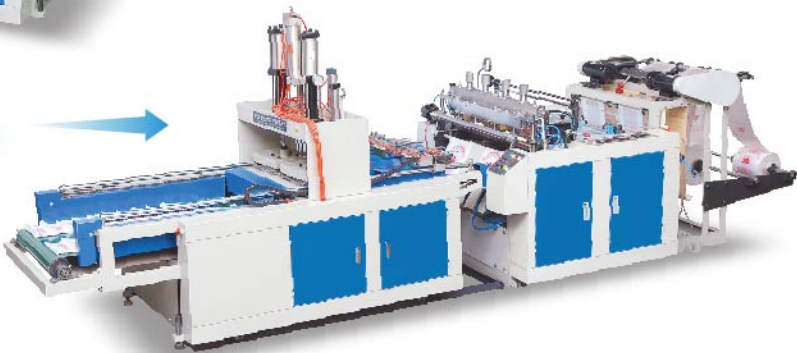

双线热切背心袋制袋机
Double lines hot cutting T-shirt
bag making machine

主要技术参数
Technical Parameters

型 号	Model	DFR-600~1000	SSH-600~1000
制袋条数	Cutting line	1-2 线 1-2 Line	1-2 线 1-2 Line
最大宽度	Max.Bag width(MM)	250-900	250-900
产品长度	Bag length(MM)	1000	1000
制袋速度	Cutting speed(PC/MIN)	50-120/ 线	50-120/line
同步电机	Film pulling	步进电机 / 伺服电机	Stepper motor/servo motor
输送带电机	Conveyor motor(KW)	N/A	1.5
冲压气缸	Punching air cylinder(T)	N/A	5
使用电源	Power supply	220V, 50Hz	220V, 50Hz

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.



液压冲口机
Hydraulic punching
machine



KS SERIES 800S-1000D

高速单/双线热切背心袋制袋机
High speed single/double line hot cutting T-shirt bag making machine

主要特点
Main Characteristics

高速热切背心袋制袋机是一种用途广泛的自动化包装设备，它的优势主要有以下几点：
1. 高速高效：该设备采用高精度伺服控制系统和进口电器元件，能够快速、稳定地完成制袋过程，并支持高速生产，最高速度可以达到每条线 300 个 / 分钟，大大提高生产效率。

2. 自动化程度高：高速热切背心袋制袋机配备了自动感应跟料系统、电子计数器等多种功能，可以实现自动计数、自动切袋等多个自动化工艺，操作简便，方便快捷。
3. 制袋精度高：该设备采用先进的热封切技术，能够保证制袋的准确性和稳定性，所制袋子尺寸精度高、一致性好、外观美观，可以满足多种包装要求。
因此，高速热切背心袋制袋机具有效率高、自动化程度高、制袋精度高等多个优势，是工厂和企业进行自动化包装的首选设备。

The high speed hot cutting T-shirt bag making machine is a widely used automatic packaging equipment. Its advantages mainly include the following points:
1. High-speed and high-efficiency: The equipment adopts high-precision servo control system and imported electrical components, which can quickly and stably complete the bag-making process, and supports high-speed production. The maximum speed can reach 300 pieces per minute per line, greatly improving production efficiency.

2. High degree of automation: The bag making machine is equipped with multiple functions such as automatic induction tracking system and electronic counter, which can realize multiple automatic processes such as automatic counting and automatic bag cutting. It is easy to operate, convenient and fast.

3. High precision of bag making: The equipment adopts advanced heat sealing and cutting technology, which can ensure the accuracy and stability of bag making. The bags made have high dimensional precision, good consistency and beautiful appearance, which can meet various packaging requirements.
Therefore, the high speed hot cutting T-shirt bag making machine has many advantages such as high efficiency, high degree of automation, and high bag-making precision. It is the first choice for factories and enterprises to carry out automatic packaging.



主要技术参数
Technical Parameter



型号	Model	KS-800S	KS-900D	KS-1000D
制袋条数	Cutting line	单线/Single line	双线/Double lines	双线/Double lines
最大宽度	Max.Bag width(MM)	700	350	400
产品长度	Bag length(MM)	1000	1000	1000
制袋速度	Cutting speed(PC/MIN)	50-300/ 线	50-300/Line	
伺服电机	Servo motor(KW)	3	3	3
主电机	Main motor(KW)	2.2	2.2	2.2
输送带电机	Conveyor motor(KW)	1.5	1.5	1.5
冲压气缸	Punching air cylinder(T)	5	5	5
使用电器	Electronics	全部采用进口电器 / All Imported Electrical Components		
使用电源	Power supply	220V, 50Hz		

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

SSR SERIES 500-1020

半自动连卷袋制袋机

Semi-automatic roll bag making machine



主要技术参数 Technical Parameters

型 号	Model	SSR-500	SSR-600	SSR-700
制袋条数	Cutting line	双线 /Double lines		
最大宽度	Max.Bag width(MM)	400	500	600
产品长度	Bag length(MM)	1000	1000	1000
制袋速度	Cutting speed(PC/MIN)	50-120/ 线	50-120/Line	
同步电机	Film pulling	步进电机	Stepper motor	
主电机	Main motor(KW)	1.5	1.5	1.5
使用电源	Power supply	220V, 50Hz		
安装尺寸	Dimension L*W*H(M)	3.6*1.15*1.8	3.6*1.25*1.8	3.6*1.35*1.8
机器重量	Gross weight(T)	0.9	0.95	1

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.



全自动连卷袋制袋机

Fully automatic roll bag making machine



主要技术参数 Technical Parameters

型 号	Model	SSR-720	SSR-1020
制袋条数	Cutting line	双线 /Double lines	单线 /Single line
产品宽度	Bag width(MM)	180-500	400-950
产品长度	Bag length(MM)	1200	1500
制袋速度	Cutting speed(M/MIN)	85*2	85
总功率	Total power(KW)	9.5	12
平均功率	Average power(KW)	4	6
使用电源	Power supply	380V, 3 Phase	380V, 3 Phase
安装尺寸	Dimension L*W*H(M)	4.8*2.1*2.1	6.3*1.9*2.3
机器重量	Gross weight(T)	2.2	2.4

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.



SG-500 & KSG-500

半自动一次性塑料手套机

Semi-automatic disposable plastic glove making machine

主要技术参数 Technical Parameters

型 号	Model	SG-500
制袋条数	Cutting line	双线 /Double lines
产品宽度	Glove width(MM)	240-290
产品厚度	Glove thickness(MM)	0.008-0.02
制套速度	Cutting speed(PC/MIN)	50-260/ 线 50-260/Line
主电机	Main motor(KW)	2.2
总功率	Total power(KW)	4.8
使用电源	Power supply	220V, 50Hz
安装尺寸	Dimension L*W*H(M)	3*1.05*1.85
机器重量	Gross weight(T)	1

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.




全自动一次性塑料手套机

Fully automatic disposable plastic glove making machine

主要技术参数 Technical Parameters


型 号	Model	KSG-500
制袋条数	Cutting line	双线 /Double lines
产品宽度	Glove width(MM)	240-290
产品厚度	Glove thickness(MM)	0.008-0.02
制套速度	Cutting speed(PC/MIN)	50-260/ 线 50-260/Line
主电机	Main motor(KW)	2.2
伺服电机	Servo motor(KW)	2.3
自动撕料伺服电机	Servo motor for tearing(KW)	2
总功率	Total power(KW)	5.8
使用电源	Power supply	220V, 50Hz
安装尺寸	Dimension L*W*H(M)	5*1.5*1.95
机器重量	Gross weight(T)	1.5

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

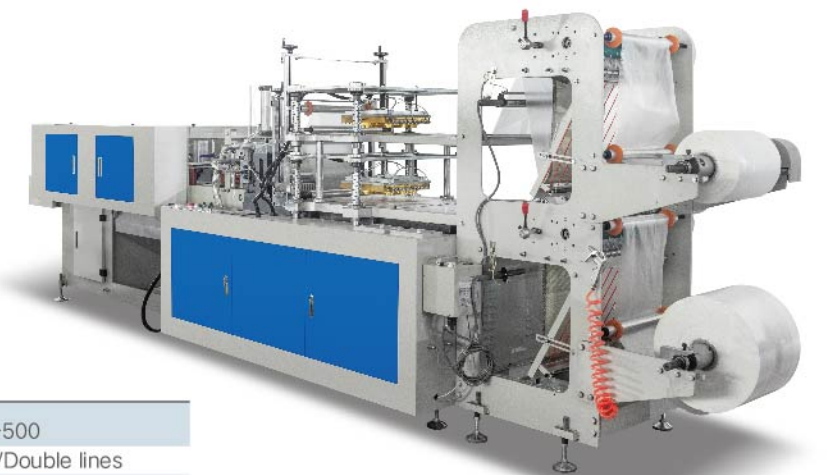

SJR SERIES 500-1000

边封制袋机
Side sealing bag making machine

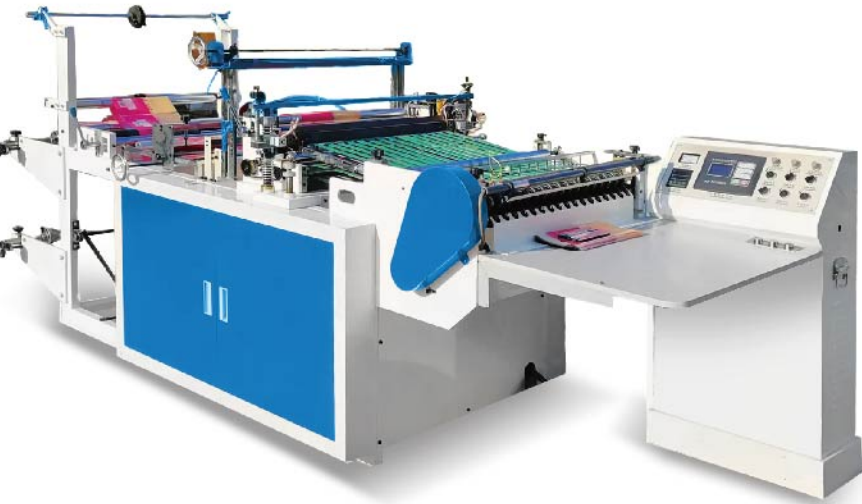

主要技术参数
Technical Parameters


型号	Model	SJR-500	SJR-700	SJR-800	SJR-1000
产品宽度	Bag width(MM)	70-470	70-670	100-770	100-970
产品长度	Bag length(MM)	40-600	50-750	55-750	60-900
制袋速度	Cutting speed(PC/MIN)	30-280	30-280	30-280	30-280
总功率	Total power(KW)	3.5	4.5	5	6.5
安装尺寸	Dimension L*W*H(M)	2.8*1*1.55	2.8*1.15*1.55	2.8*1.25*1.55	3.1*1.45*1.55
机器重量	Gross weight(T)	0.6	0.8	0.9	1

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.


SPECIAL SHAPE BAG MAKING MACHINE

异形袋制袋机


欢迎来图来样定制各类异形袋制袋机
Special shape bag making machines tailored to your designs and samples




软式手提环袋
Loop Handle Bag



拉绳手提袋
String Draw Bag



软式手提袋
Carry Bag



派奇手提袋
Patch Bag

应用领域
Application fields



YT SERIES 2600-61200

柔版印刷机
Flexographic printing machine



主要技术参数
Technical Parameters

型号	Model	YT-2600 YT-21200	YYT-4600 YT-41200	YT-6600 YT-61200
颜色	Color	2	4	6
最大印料宽度	Max. Material width(MM)	630-1230	630-1230	630-1230
最大印刷宽度	Max. Printing width(MM)	560-1160	560-1160	560-1160
印刷长度	Printing length(MM)	200-1060	250-1060	300-1060
驱动方式	Drive type	直齿传动	大斜齿轮传动	同步带传动
起落版方式	Printing cylinder	气动	液压	
		Pneumatic control	Big helical gear drive	Synchronous belt drive
机械速度	Mechanical speed(M/MIN)	60	90	135
印刷速度	Printing speed(M/MIN)	50	80	90
网纹辊	Anilox roller	金属网纹辊	金属 / 陶瓷网纹辊	
		Metal:100-300LPI	Metal:100-300LPI / Ceramic:200-800LPI	
总功率	Total power(KW)	8-14	20-30	40-48

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

ASY SERIES 600-1200A

凹版印刷机
Gravure printing machine



高速电脑凹版印刷机
High-speed computer gravure printing machine



主要技术参数
Technical Parameters


型号	Model	ASY-600-ASY-1200	ASY-600A-ASY-1200A
颜色	Color	1 色 1 组 1 Color/unit	1 色 1 组 1 Color/unit
印刷宽度	Printing width(MM)	600-1200	600-1200
印刷长度	Printing length(MM)	200-1100	200-1100
印刷速度	Printing speed(M/MIN)	10-60	10-120
对版精度	Precision(MM)	0.25	0.12

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

SLZ SERIES 90-120/130

单机造粒机

Single stage recycling machine

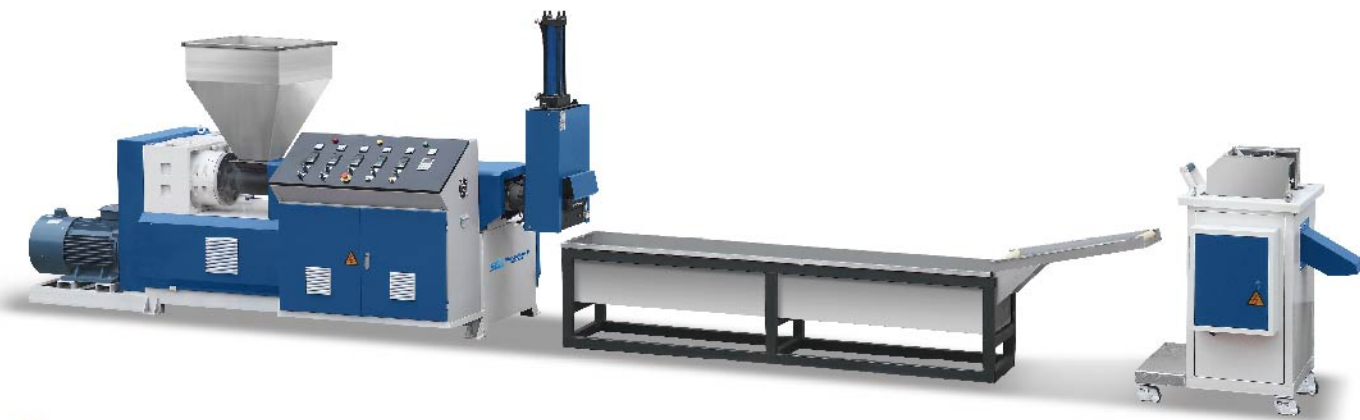


主要技术参数 Technical Parameters

型号	Model	SLZ-90	SLZ-100	SLZ-110	SLZ-120
螺杆直径	Screw diameter(MM)	90	100	110	120
螺杆长径比	Screw L/D ratio	22:1	22:1	22:1	22:1
螺杆转速	Screw rotation(R/MIN)	10-100	10-100	10-100	10-100
主电机功率	Main motor(KW)	22	30	37	45
最大挤出量	Max.Extrusion output(KG/H)	70	95	120	135
安装尺寸	Dimension L*W*H(M)	8*1.2*1.8	8.2*1.6*1.8	8.5*1.6*1.8	8.8*1.6*1.8
机器重量	Gross weight(T)	2	2.1	2.2	2.5

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

子母造粒机

Double stage recycling machine

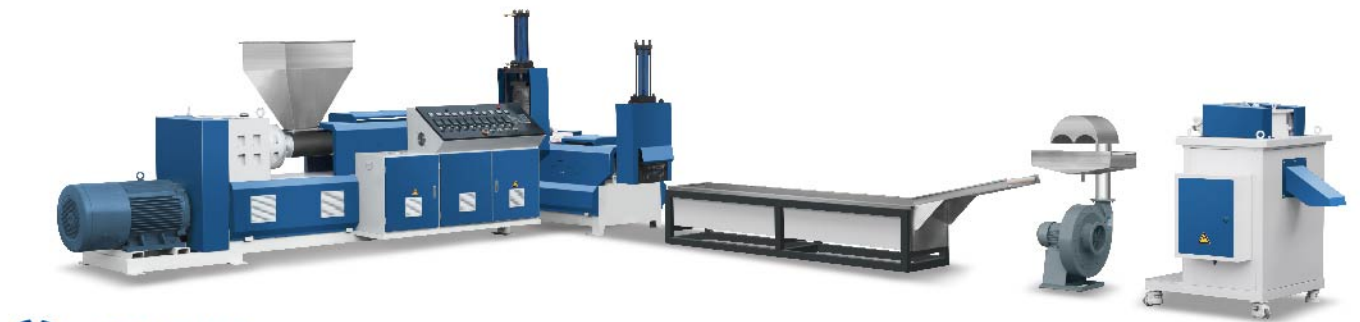

主要技术参数 Technical Parameters

型号	Model	SLZ-90/100	SLZ-100/110	SLZ-110/120	SLZ-120/130
螺杆直径	Screw diameter(MM)	90/100	100/110	110/120	120/130
螺杆长径比	Screw L/D ratio	22:1	22:1	22:1	22:1
螺杆转速	Screw rotation(R/MIN)	10-100	10-100	10-100	10-100
主电机功率	Main motor(KW)	15/22	18.5/30	18.5/37	22/45
最大挤出量	Max.Extrusion output(KG/H)	100	120	140	160
安装尺寸	Dimension L*W*H(M)	8*3*1.8	8.2*3*1.8	8.5*3*1.8	8.8*3*1.8
机器重量	Gross weight(T)	3	3.2	3.4	3.6

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

LS SERIES & WS SERIES 700-2400

分切机

Slitting machine



主要技术参数 Technical Parameters

型号	Model	LS-700~2000	WS-700~2400
机器形式	Type	立式 /Vertical	卧式 /Horizontal
最大宽度	Max.Width(MM)	700-2000	700-2400
最大放料直径	Max. Unwind diameter(MM)	600	1200
最大收料直径	Max. Rewind diameter(MM)	400-500	600-800
最小分切卷材宽度	Minimum cutting width(MM)	30	30
分切速度	Speed(M/MIN)	200	200
纠偏精度	Precision for EPC(MM)	0.5	0.5

注：数据如有更改，恕不另行通知。Design and specifications are subject to change without notice.
可按客户要求定制机器。Machines can be customized according to customer requirements.

辅助设备

Auxiliary equipment



混色机
Mixer



自动吸料机
Auto Loader



干燥机
Dryer



边料回收机
Edge Recycling Machine



混炼机
Agglomerator



米克重
Weight Controller



计量称重控制系统
Measurement And Weighing Control



快速换网器
High-Speed Screen Changer



粉碎机
Crusher



冷水机
Chiller



液压换网
Hydraulic Screen Changer



电晕处理器
Corona Treater



折边机
Folding Machine

MORE